

CURRICULUM LEARNING: A REGULARIZATION METHOD FOR EFFICIENT AND STABLE BILLION-SCALE GPT MODEL PRE-TRAINING

Conglong Li, Minjia Zhang, Yuxiong He

Microsoft

{Conglong.Li, minjiaz, yuxhe}@microsoft.com

ABSTRACT

Recent works have demonstrated great success in training high-capacity autoregressive language models (GPT, GPT-2, GPT-3) on a huge amount of unlabeled text corpus for text generation. Despite showing great results, autoregressive models are facing a growing training instability issue. Our study on GPT-2 models (117M and 1.5B parameters) show that larger model sizes, sequence lengths, batch sizes, and learning rates would lead to lower training stability and increasing divergence risks. To avoid divergence and achieve better generalization performance, one has to train with smaller batch sizes and learning rates, which leads to worse training efficiency and longer training time. To overcome this stability-efficiency dilemma, we present a study of a curriculum learning-based approach, which helps improve the pre-training convergence speed of autoregressive models. More importantly, we find that curriculum learning, as a regularization method, exerts a gradient variance reduction effect and enables to train autoregressive models with much larger batch sizes and learning rates without training instability, further improving the training speed. Our evaluations demonstrate that curriculum learning enables training GPT-2 models with 8x larger batch size and 4x larger learning rate, whereas the baseline approach struggles with training divergence. To achieve the same validation perplexity targets during pre-training, curriculum learning reduces the required number of tokens and wall clock time by up to 61% and 49%, respectively. To achieve the same or better zero-shot WikiText-103/LAMBADA evaluation results at the end of pre-training, curriculum learning reduces the required number of tokens and wall clock time by up to 54% and 70%, respectively.

1 INTRODUCTION

Large-scale Transformer-based language models have powered breakthroughs in many natural language processing tasks. These models contain up to billion-scale parameters and are trained on massive open-domain web text corpus with unsupervised learning. Among them, one of the most successful cases is the GPT family: from GPT (110M parameters) (Radford et al., 2018a), to GPT-2 (1.5B parameters) (Radford et al., 2018b), and to GPT-3 with 175B parameters (Brown et al., 2020) that hit record high accuracy for many NLP tasks. Recent studies (Kaplan et al., 2020) show that these models continue to achieve better accuracy as their sizes increase (together with richer training data), indicating the model size will continue growing in the future.

Despite achieving remarkable model accuracy, training these models raise huge challenges on training efficiency and instability. On one hand, training large models require an extremely huge amount of computation. As an example, it requires approximately 14.8 days on 10000 V100 GPUs to train GPT-3 (Patterson et al., 2021). To reduce the training wall clock time of these large models, one of the most common solutions is to employ distributed training with hundreds or even thousands of GPUs across multiple machines such that the model can process the training data with much higher throughput. Meanwhile, to avoid the huge overhead incurred by cross-GPU/node communication in distributed training, practitioners increase the batch sizes in the optimization algorithm to increase the computation-communication ratio, to improve training efficiency and reduce training wall clock time.

Despite increased training throughput and efficiency, increasing the batch size is not always the panacea, as it often leads to training instability during pre-training GPT models — training would diverge or recover from divergence but overall lead to slow/worse convergence. We conduct a thorough study of the GPT-2 pre-training task (Radford et al., 2018b; Shueybi et al., 2019) with different batch sizes, models sizes, sequence lengths, and learning rates. We find that larger batch sizes and longer sequence lengths reduce training stability and increase divergence risk, especially when combined with larger model sizes and learning rate. This often leads to slower and worse convergence that hurts final generalization performance. To achieve stable training and avoid sub-optimal generalization performance, common practice often resorts to using smaller batch sizes and learning rates, which would adversely affect training efficiency.

In this work, we explore a curriculum learning-based approach to address the above training efficiency-stability dilemma. Curriculum learning (CL) was proposed to improve training convergence speed by presenting easier/simpler examples earlier during training and gradually increasing the sample difficulties (Elman, 1993; Sanger, 1994; Bengio et al., 2009). CL was explored and verified for NLP fine-tuning tasks (Kocmi & Bojar, 2017; Bojar et al., 2017; Zhang et al., 2018; Platanios et al., 2019; Zhang et al., 2019; Sachan & Xing, 2016; 2018; Tay et al., 2019; Xu et al., 2020), but its application to pre-training GPT models is not well studied. We find that curriculum learning, as expected, could improve the convergence speed under the same training hyperparameters. More importantly, we find that curriculum learning, as a regularization method, can enable stable and efficient training with much larger batch sizes and learning rates than existing baseline approaches. Our analysis shows that one reason for curriculum learning’s better training stability lies in its gradient variance reduction effect: Although the gradient variance is generally reduced under larger batch size, the largest variance on certain dimensions (i.e., the outliers) is increased and it reaches extreme values when training divergence happens. Using Adam optimizer’s variance term, we observe that curriculum learning helps reduce both the gradient variance norm and the maximum variance outliers. This variance reduction effect helps curriculum learning to achieve stable large-batch training without hurting the token-wise convergence speed and final generalization performance.

We implement curriculum learning using sequence length as a primary difficulty metric and apply it to the GPT-2 pre-training with up to 1.5B parameters. Evaluations show that curriculum learning enables stable and efficient training with 8x larger batch size and 4x larger learning rate, where the baseline approach struggles with training divergence. To achieve the same validation perplexity targets during pre-training, curriculum learning reduces the required number of tokens and wall clock time by up to 61% and 49%, respectively. To achieve the same or better zero-shot WikiText-103/LAMBADA evaluation results at the end of pre-training, curriculum learning reduces the required number of tokens and wall clock time by up to 54% and 70%, respectively.

We make the following contributions: i) We conduct an extensive study of the GPT-2 pre-training task, which provides detailed insights about the training stability-efficiency dilemma that motivate our work (Section 3). ii) We present an implementation of curriculum learning based on sequence length for GPT-2 model (and autoregressive model in general), which is both efficient and easy to integrate (Section 4). iii) We conduct large-scale experiments to demonstrate the proposed work’s ability to provide superior training stability and efficiency at the same time. To the best of our knowledge, we are the first work to demonstrate the benefit of curriculum learning as a regularization method that improves training stability (Section 5). iv) The curriculum learning implementation as well as the necessary changes to the GPT-2 pre-training framework has been open sourced in a deep learning optimization library called DeepSpeed¹.

2 BACKGROUND AND RELATED WORK

Language model pre-training The accuracy of transformer-based language models grows substantially with its model size (Radford et al., 2018a,b; Brown et al., 2020). Today, a large language model such as GPT-3 (Brown et al., 2020) contains up to 175B parameters, and recent studies show that model accuracy can continue to improve with even larger model sizes (Kaplan et al., 2020). However, training these large models often incurs excessively long training time and training difficulties (Brown et al., 2020). Therefore, there are a lot of demands of performing efficient and stable training for large-scale LMs. To have the pre-training finished in a reasonable amount of time, the most common

¹<https://github.com/microsoft/DeepSpeed>, <https://www.deepspeed.ai/>

way is to leverage data parallelism to train models on multiple GPUs. However, the speedup gains often saturate beyond a few tens of GPUs, because communication becomes the major bottleneck, i.e., the workers will spend more time communicating gradients than computing them, as the number of GPUs increases. To mitigate this bottleneck, recent works such as 1-bit Adam (Tang et al., 2021) have studied gradient compression and demonstrate their effectiveness against auto-encoding models such as BERT (Devlin et al., 2019). An alternative approach to alleviate these overheads is to use large batch sizes. For example, LAMB (You et al., 2020) and 1-bit LAMB (Li et al., 2021) enable stable and efficient distributed BERT pre-training with batch size up to 64K/32K (for sequence length 128/512, i.e., 8M/16M tokens per batch) while maintaining the sample-wise convergence speed. For encoder-decoder models such as T5, Raffel et al. (2020) use batch size up to 2K (for sequence length 512, i.e., 1M tokens per batch). For autoregressive models such as the GPT family (Radford et al., 2018a;b; Brown et al., 2020), existing works use batch size up to 1.6K (for sequence length 2K, i.e., 3.2M tokens per batch). Despite the benefit of reduced communication overhead, large-batch training is sensitive to hyperparameters and often leads to issues such as slow convergence, training instabilities, and model divergence.

Curriculum learning Inspired by the highly organized curriculum when training human and animal, curriculum learning aims to improve machine learning model training convergence speed by presenting easier (or less complex) examples earlier during training (Elman, 1993; Sanger, 1994; Bengio et al., 2009). Previous studies have demonstrated the benefit of faster convergence speed by curriculum learning in many domains such as natural language processing, computer vision, and neural evolutionary computing. In this section we will discuss recent related works in the natural language processing area. For a more complete literature review, we recommend these recent survey papers (Wang et al., 2020; Soviany et al., 2021).

In the natural language processing area, most of the curriculum learning works focus on downstream fine-tuning tasks, such as neural machine translation (NMT) (Kocmi & Bojar, 2017; Bojar et al., 2017; Zhang et al., 2018; Platanios et al., 2019; Zhang et al., 2019) and natural language understanding (NLU) (Sachan & Xing, 2016; 2018; Tay et al., 2019; Xu et al., 2020). These works show that curriculum learning can improve fine-tuning convergence speed, reduce training time, and improve accuracy. In these works, the curriculum difficulty metrics for each training sample are usually defined as the sentence length, vocabulary frequency, the inference loss on smaller/cheaper models, or based on self-paced learning (Kumar et al., 2010). For the pacing function (i.e., to decide the curriculum difficulty range when sampling next training data batch), these works usually use fixed predefined functions (e.g., gradually increase difficulty upper bound by linear, root, and exponential functions), bucketing heuristics (group data with similar difficulties, and sample from a subset of buckets every time), or based on self-paced learning.

Only a few works explore curriculum learning for language model pre-training. Press et al. (2020) apply curriculum learning to neural language modeling pre-training, specifically a transformer model with 247M parameters (Baevski & Auli, 2018). They find that by adding an additional first training stage with a shorter sequence length, it is possible to achieve the same dev. set perplexity with shorter total training time. Zhang et al. (2021) apply curriculum learning to BERT-base pre-training, a transformer model with 110M parameters. They find that by grouping sequences with similar length and with curriculum learning, it is possible to achieve similar downstream task accuracy with shorter pre-training time. Campos (2021) apply curriculum learning to ELMo pre-training, a bi-directional LSTM model with 93.6M parameters (Peters et al., 2018). They test a variety of curricula on the WikiText-2 and WikiText-103 but do not find strong evidence that the use of curriculum learning can improve language model pre-training.

3 MOTIVATION AND INSIGHTS

In this section we perform an in-depth analysis of the GPT-2 model pre-training baseline (without curriculum learning). We follow the training pipeline from the NVIDIA Megatron-LM work (Shoeybi et al., 2019)². All of the experiments are performed on 128 NVIDIA V100 GPUs (32GB memory). There are 16 nodes, and each node has 8 GPUs. GPUs inside the same node are connected by NVLink 2.0, and nodes are connected by a 100 Gigabit InfiniBand EDR inter-node network.

²<https://github.com/NVIDIA/Megatron-LM>

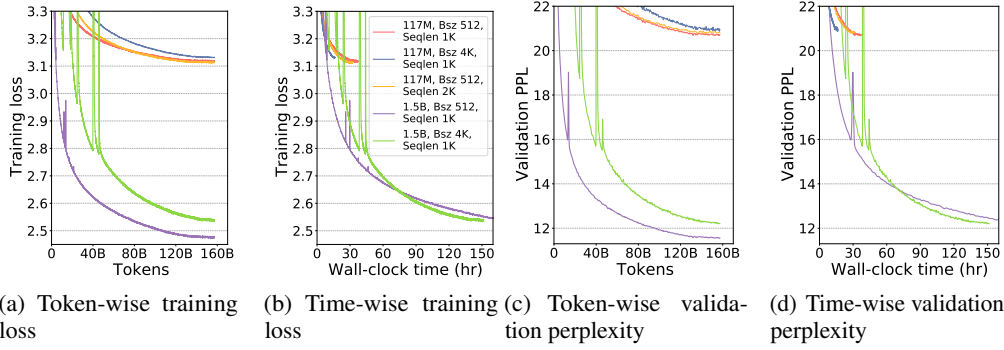


Figure 1: Training loss and validation perplexity during GPT-2 pre-training (baseline without curriculum learning) under different model sizes, batch sizes (and LR), and sequence lengths. All subfigures share the same legend as 1(b). In 1(b) and 1(d), the purple line for “1.5B, Bsz 512, SeqLen 1K” is truncated (the whole training takes 341 hours).

Model and dataset We evaluate two GPT-2 model sizes from the original GPT-2 work (Radford et al., 2018b): one with 117M parameters (12 layers, 768 hidden size, 12 attention heads), and one with 1.5B parameters (48 layers, 1600 hidden size, 25 attention heads). For training data, we collect and use the same dataset blend as the Megatron-LM work: Wikipedia (Devlin et al., 2019), CC-Stories (Trinh & Le, 2018), RealNews (Zellers et al., 2019), and OpenWebtext (Radford et al., 2019).

Training parameters We evaluate two sets of training parameters. The first set follows the Megatron-LM work: batch size 512, 300K total training steps (157B tokens), and learning rate 1.5×10^{-4} with a linear warmup of 3K steps and a single cycle cosine decay over the remaining 297K steps (with minimum learning rate 1×10^{-5}). The second parameter set tests a more aggressive training strategy: batch size 4K ($8\times$ larger), 37.5K total training steps (157B tokens), and learning rate 6×10^{-4} ($4\times$ larger) with a linear warmup of 3K steps and a single cycle cosine decay over the remaining 34.5K steps (same minimum learning rate). For sequence length/context size, we mainly use 1K which is the default for GPT-2. But we also test 2K (on the smaller 117M model with batch size 512 and 157B tokens) which is the default for GPT-3 (Brown et al., 2020). All experiments are performed with mixed precision/FP16 training, Adam optimizer ($\beta_1 = 0.9$, $\beta_2 = 0.999$, $\epsilon = 1 \times 10^{-8}$) (Kingma & Ba, 2015), weight decay of 0.01, checkpoint activation, same random seed (for Python, NumPy, PyTorch, and CUDA), and gradient clipping.

The stability-efficiency dilemma Figure 1 presents the training loss and validation perplexity for 5 cases (baseline without curriculum learning) under different model sizes, batch sizes (and LR), and sequence lengths. First, the 1.5B model training is much more unstable and has many divergences. This is even worse when applied with a larger batch size/learning rate, where the final validation perplexity becomes worse as shown in Figure 1(c). Similarly for the 117M model, larger batch size/LR or longer 2K sequence length both lead to worse final validation perplexity (and worse zero-shot WikiText-103/LAMBADA evaluation results as we will later see in Table 2 Section 5).

From the token-wise convergence, it seems that a smaller batch size/learning rate is preferable because of its better generalization performance. However, Figure 1(b) and 1(d) show that such cases would lead to much worse training efficiency. With a larger batch size/learning rate, it is possible to complete the same 157B-token training with much less wall clock time. For the 1.5B model, it takes 341 and 151 hours to complete the training under batch size 512 and 4K, respectively. Overall, this demonstrates the stability-efficiency dilemma for baseline pre-training: With smaller batch size/learning rates, the training is more stable and can achieve better final generalization, but presumably with poorer training efficiency; With larger batch size/learning rates, the training is more efficient, but with lower stability and worse generalization. As a solution, in the next section we will describe how we design and implement curriculum learning, which resolves this dilemma for the GPT-2 model pre-training task.

4 DESIGN AND IMPLEMENTATION

Difficulty metric: sequence length After considering various metrics used in related works, we choose the sequence length as the curriculum difficulty metric (start from shorter sequence training data, then gradually increase the sequence length) for two reasons: i) Sequence length as the curriculum difficulty metric has been proven to be effective in the NLP area; ii) For each Transformer block, the self-attention and intermediate layers have time complexity of $O(B \times L^2 \times H)$ and $O(B \times L \times H^2)$, respectively³. By reducing the sequence length, we reduce the time complexity quadratically for the self-attention sub-layer and linearly for the intermediate sub-layer of Transformer blocks. To support curriculum learning, traditional implementation would require "training data reordering" to sample from data subsets that are below certain difficulty levels. This adds additional cost before training (to compute the difficulty of data) and during training (data subset sampling). For sequence length metric, we develop a truncation-based implementation that incurs less cost: During the baseline GPT-2 pre-training, the raw text inputs are truncated into sequences with the same length to form a mini-batch regardless of the lengths of the actual sentences. To enable curriculum learning, we still let the dataloader truncate the raw text into samples with the same full sequence length. Then at each step given the sequence length determined by the pacing function, we truncate sequences to form a modified mini-batch for training.

Pacing function: step-wise linear We choose a step-wise linear pacing function with the following definition: Given a starting sequence length $seqlen_1$, an ending sequence length $seqlen_2$ (baseline full sequence length), and a curriculum learning duration T (number of steps), the sequence length used for the training batch at step t is $seqlen_t = seqlen_1 + (seqlen_2 - seqlen_1) \times \min(\frac{t}{T}, 1)$. We choose this pacing function for two reasons: First, such fixed heuristic pacing functions are easy to implement and proved effective in the NLP area. Second, step-wise linear function conveys two different functions that are intuitively convincing: i) step-wise linear means that we will perform optimization and update the model for the same number of times for each distinct sequence length; ii) because different sequence lengths lead to different number of tokens in a batch, at longer sequence lengths (higher difficulty) we will learn from more tokens.

Besides step-wise linear, we also explored 3 other pacing functions: i) We tried a discrete 2-stage pacing function from (Press et al., 2020), but it provides less stability benefit (Section 5.4). ii) We tried a step-wise root function ($seqlen_t = seqlen_1 + (seqlen_2 - seqlen_1) \times \min((\frac{t}{T})^r, 1)$, where r is the root degree), which performs similar to linear and requires one extra hyperparameter. iii) We tried an adaptive pacing function based on the progress of training/validation loss, which also performs similar and requires extra tuning.

5 EVALUATION

In this section we evaluate curriculum learning for GPT-2 pre-training. Our analysis shows that curriculum learning can provide stable training at batch size 4K where baseline struggles with divergence issue. In addition, curriculum learning greatly reduces the required number of tokens and training time to reach the same validation perplexity and zero-shot evaluation results.

Methodology For model, dataset, and hardware, we follow the same methodology in Section 3. For the curriculum learning configurations (defined in Section 4), we use $seqlen_1 = 8/64$ (for 117M/1.5B model) and $seqlen_2 = 1K$ (i.e., the full sequence length). To fully utilize the Tensor Core acceleration in NVIDIA V100 GPU, we add a $seqlen_t = seqlen_t - (seqlen_t \bmod 8)$ postprocessing to make sure the sequence length is always a multiple of 8. For the curriculum duration T , we tune this parameter and use different numbers for each case. We analyze and find a low-cost tuning strategy that only requires running the first tens of steps (details in Appendix A.1). For the training parameters, for curriculum learning we use the same shared parameters as the baseline in Section 3 except two parameters: 1) Because during curriculum learning the number of tokens in a data batch is smaller, we modify the training termination condition so that all cases stop when reaching the same 157B training tokens. 2) Because of 1) curriculum learning cases now have more training steps, which make it necessary to modify the learning rate decay schedule to have a fair comparison with the

³ B, L, H represent the batch size, sequence length, hidden size.

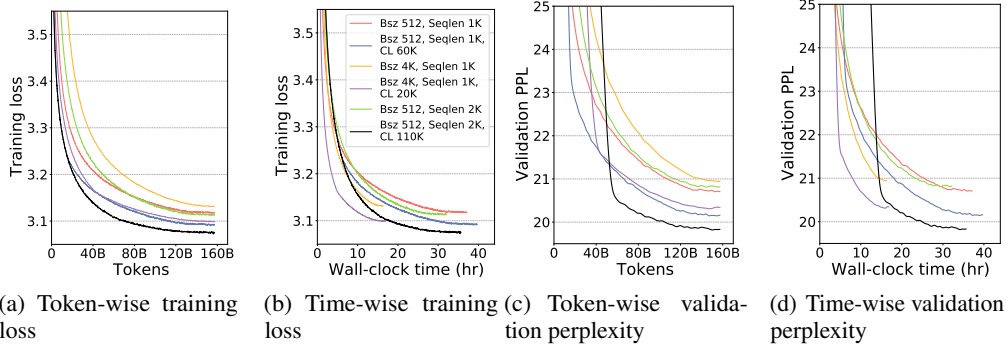


Figure 2: Training loss and validation perplexity during GPT-2 117M pre-training, comparing the baseline and curriculum learning under different batch sizes/LR and sequence lengths. All sub figures share the same legend as 2(b) (“CL 60K” means applying curriculum learning to the first 60K steps).

Table 1: Number of tokens (Billion) and wall clock time (Hour) to reach the same validation perplexity during GPT-2 117M pre-training, comparing the baseline and curriculum learning under different batch sizes/LR and sequence lengths.

Vali PPL Target	Bsz 512, Seqlen 1K Baseline / CL 60K Num. tokens / Wall time	Bsz 4K, Seqlen 1K Baseline / CL 20K Num. tokens / Wall time	Bsz 512, Seqlen 2K Baseline / CL 110K Num. tokens / Wall time
21.5	69.0B / 35.55B (48% ↓) 16.28Hr / 10.81Hr (34% ↓)	99.41B / 46.98B (53% ↓) 10.31Hr / 5.4Hr (48% ↓)	73.4B / 51.56B (30% ↓) 14.96Hr / 13.94Hr (7% ↓)
21	96.78B / 58.51B (40% ↓) 22.84Hr / 16.25Hr (29% ↓)	132.12B / 69.63B (47% ↓) 13.71Hr / 7.75Hr (43% ↓)	102.55B / 53.36B (48% ↓) 20.9Hr / 14.32Hr (31% ↓)
Baseline best	Vali PPL = 20.38 135.63B / 84.46B (38% ↓) 32.0Hr / 22.4Hr (30% ↓)	Vali PPL = 20.87 156.87B / 77.6B (51% ↓) 16.27Hr / 8.57Hr (47% ↓)	Vali PPL = 20.55 143.34B / 55.7B (61% ↓) 29.23Hr / 14.82Hr (49% ↓)
CL best	Vali PPL = 19.85 Did not reach / 136.47B Did not reach / 34.73Hr	Vali PPL = 20.23 Did not reach / 146.8B Did not reach / 15.75Hr	Vali PPL = 19.6 Did not reach / 135.58B Did not reach / 31.18Hr

baseline. For 117M model cases, we increase the number of learning rate decay steps by half of the curriculum learning duration. However, we find that this is still not ideal. So for 1.5B model cases, we change the learning rate decay to token-wise (same cosine decay over the 157B tokens) instead of step-wise. We describe the underlying rationale in Appendix A.2.

5.1 GPT-2 117M EVALUATIONS

Convergence speed. Figure 2 demonstrates that curriculum learning provides better token and time-wise convergence compared to the baseline under the same batch size/LR and sequence length. In addition, “Bsz 4K, Seqlen 1K, CL 20K” provides better token and time-wise convergence than “Bsz 512, Seqlen 1K, Baseline”, which demonstrates that curriculum learning provides stable and efficient large-batch training while maintaining the convergence speed and final generalization performance. As a result, curriculum learning combined with large-batch training provides a solution to the training stability-efficiency dilemma.

Tokens/time to reach the same validation perplexity. To quantitatively measure the token and time-wise convergence speedup, Table 1 summarizes that for baseline and curriculum learning to reach the same validation perplexity during pre-training, what is the required number of tokens and training time. In this table, we compare each pair of baseline and curriculum learning cases under the same batch size and sequence length. Results show that curriculum learning reduces the required number of tokens and training time by up to 61% and 49%, respectively. In addition, curriculum learning achieves validation perplexity that baseline is unable to achieve during the whole training.

Zero-shot evaluation. Last, we perform zero-shot evaluation of the trained models on the WikiText-103 and LAMBADA datasets using the same methodology in the Megatron-LM work (Shoeybi et al., 2019). In Table 2 we compare all cases to the baseline case with batch size 512 and sequence length

Table 2: Zero-shot evaluation of the trained models on the WikiText-103 and LAMBADA datasets, following the evaluation methodology from (Shoeybi et al., 2019). Case 2 to 9 are compared with case 1, and case 11 to 17 are compared with case 10. Case 16 (Press et al., 2020) and 17 (Brown et al., 2020) are related works.

Case	Pre-training parameters	Pre-training steps, tokens, time	WikiText perplexity ↓	LAMBADA accuracy ↑
117M:				
1: Baseline	bsz512-seqlen1K	300K, 157B, 37Hr	27.78	33.19%
2: CL 60K	bsz512-seqlen1K	210K, 94B (40% ↓), 25Hr (32% ↓)	27.75	34.00%
3: CL 60K	bsz512-seqlen1K	330K, 157B (→), 40Hr (8% ↑)	27.10	34.56%
4: Baseline	bsz4K-seqlen1K	37.5K, 157B (→), 16Hr (57% ↓)	28.09	32.54%
5: CL 20K	bsz4K-seqlen1K	33K, 96B (39% ↓), 11Hr (70% ↓)	27.66	33.71%
6: CL 20K	bsz4K-seqlen1K	47.5K, 157B (→), 17Hr (54% ↓)	27.12	34.74%
7: Baseline	bsz512-seqlen2K	150K, 157B (→), 32Hr (14% ↓)	28.19	32.99%
8: CL 110K	bsz512-seqlen2K	125K, 73B (54% ↓), 18Hr (51% ↓)	27.18	33.81%
9: CL 110K	bsz512-seqlen2K	205K, 157B (→), 36Hr (3% ↓)	26.43	34.02%
1.5B:				
10: Baseline	bsz512-seqlen1K	300K, 157B, 341Hr	13.89	57.29%
11: CL 270K	bsz512-seqlen1K	360K, 122B (22% ↓), 286Hr (16% ↓)	13.89	57.38%
12: CL 270K	bsz512-seqlen1K	428K, 157B (→), 364Hr (7% ↑)	13.88	57.89%
13: Baseline	bsz4K-seqlen1K	37.5K, 157B (→), 151Hr (56% ↓)	14.76	55.06%
14: CL 45K	bsz4K-seqlen1K	50K, 121B (23% ↓), 121Hr (65% ↓)	13.88	58.20%
15: CL 45K	bsz4K-seqlen1K	58.8K, 157B (→), 155Hr (55% ↓)	13.72	58.47%
16: 2-stage CL 20K	bsz4K-seqlen1K	55K, 157B (→)	14.14	57.23%
17: Bsz Warmup 45K	bsz4K-seqlen1K	58.8K, 157B (→)	14.21	56.36%

1K, the original configuration in Megatron-LM work. For each curriculum learning (CL) case we present two rows: one evaluated at the earliest checkpoint that provides better eval results; the other one evaluated at the end of full training. At batch size 512, CL provides up to 40%/32% token/time reduction while achieving better evaluation results (case 1, 2). After full training, CL takes 8% more time because it needs more steps to reach the same 157B tokens, but more importantly CL provides even better eval results (case 3). When increasing the batch size or sequence length for baseline, the training time is reduced but the evaluation results get worse due to less stable training and worse convergence (case 4, 7). On the other hand, CL with a larger batch size/sequence length can provide both great token/time saving (up to 54%/70%) and better eval results (case 5, 6, 8, 9).

5.2 GPT-2 1.5B EVALUATIONS

Convergence speed. Figure 3 demonstrates that curriculum learning provides better token-wise convergence compared to the baseline under the same batch size. In addition, “Bsz 4K, CL 15K” provides better token and time-wise convergence than “Bsz 512, Baseline”, which demonstrates that curriculum learning provides stable and efficient large-batch training while maintaining the convergence speed. For the batch size 512 case, curriculum learning provides smaller time-wise speedup. This is because in this case, the communication overhead is too high so that the time saving provided by curriculum learning’s shorter sequences becomes relatively smaller. Another reason is that the baseline is more stable at batch size 512.

Tokens/time to reach the same validation perplexity. Table 3 summarizes the required number of tokens and training time for baseline and curriculum learning to reach the same validation perplexity. Results show that curriculum learning reduces the required number of tokens and training time by up to 45% and 41%, respectively. Compared to baseline with batch size 512, curriculum learning with batch size 4K can achieve better final validation perplexity together with much better training efficiency, demonstrating the dual stability-efficiency capability.

Zero-shot evaluation. At batch size 512, curriculum learning can achieve better eval results with 22%/16% less token/time and achieve even better eval results after full training (case 10, 11, 12 in Table 2). Baseline with a larger batch size 4K has better efficiency but worse stability/eval results (case 13), while CL with a larger batch size provides both efficiency and stability (case 14, 15).

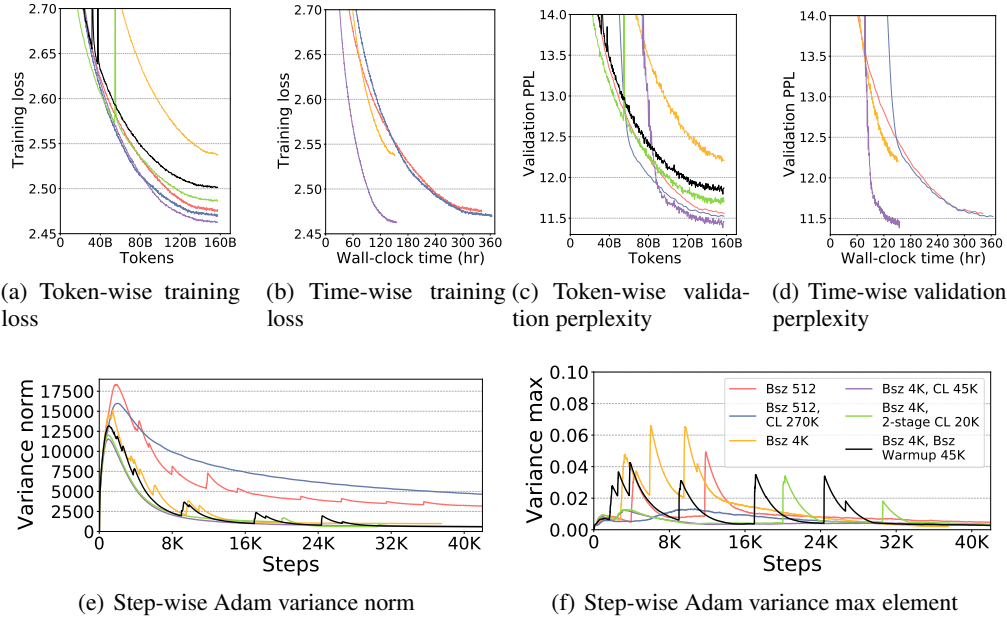


Figure 3: Training loss, validation perplexity, and Adam variance norm/max element during GPT-2 1.5B SeqLen 1K pre-training, comparing the baseline and curriculum learning under different batch sizes/LR. Also compare with two related works (“2-stage CL” (Press et al., 2020) and “Bsz Warmup” (Brown et al., 2020)) described in Section 5.4. These two related works are not presented in 3(b) and 3(d) because they are performed on different hardware. All subfigures share the same legend as 3(f) (“CL 45K” means applying curriculum learning to the first 45K steps).

Table 3: Number of tokens (Billion) and wall clock time (Hour) to reach the same validation perplexity during GPT-2 1.5B SeqLen 1K pre-training, comparing the baseline and curriculum learning under different batch sizes/LR.

Vali PPL Target	Bsz 512		Bsz 4K	
	Baseline	CL 270K	Baseline	CL 45K
Num. tokens / Wall time				
12.25	74.24B / 61.64B (17% ↓)	161.38Hr / 153.28Hr (5% ↓)	148.48B / 85.45B (42% ↓)	142.86Hr / 87.76Hr (39% ↓)
12	83.62B / 68.87B (18% ↓)	181.71Hr / 169.44Hr (7% ↓)	Did not reach / 87.79B	Did not reach / 89.99Hr
Baseline best	Vali PPL = 11.4	155.29B / 143.91B (7% ↓)	Vali PPL = 12.2	154.77B / 85.45B (45% ↓)
	336.74Hr / 334.23Hr (1% ↓)	148.91Hr / 87.76Hr (41% ↓)		
CL best	Vali PPL = 11.37	Did not reach / 152.56B	Vali PPL = 11.38	Did not reach / 156.16B
	Did not reach / 353.21Hr	Did not reach / 154.29Hr		

5.3 VARIANCE REDUCTION HELPS STABILIZE TRAINING.

For stochastic gradient optimization, when the gradient variance is large, the algorithm might spend much time bouncing around, leading to slower convergence and potential divergence (Wang et al., 2013). Previous studies show that variance reduction methods improve training stability in areas such as reinforcement learning (Mao et al., 2018; Cheng et al., 2019; Anschel et al., 2017). During our study of curriculum learning, one surprising finding is that curriculum learning can, in addition to the well-known benefit of faster convergence speed, help to reduce this gradient variance norm/max element, which is presumably why it leads to much more stable training under large model size and large batch size/LR. Figure 3(e) and 3(f) plot the l_1 norm⁴ and max element of Adam’s variance term ($\sqrt{v_t}$, where $v_t = \beta_2 v_{t-1} + (1 - \beta_2)(g_t)^2$) for the GPT-2 1.5B case. We plot them step-wise since the optimization and model update are performed at every step.

⁴Here we use l_1 norm to avoid outlier amplification.

We see that when batch size/LR increases, the variance norm decreases but the max element increases. When comparing GPT-2 117M and 1.5B cases (not shown in figure), we see that when model size increases both the variance norm and max element increase. When sequence length increases for the GPT-2 117M case, the variance norm stays the same but the max element increases. These demonstrate that large gradient variance norm/max element is one of the symptoms of the training instability issue, similar to what was observed in the aforementioned studies in reinforcement learning area. We find that curriculum learning stabilizes training and reduces both the Adam variance norm and the variance max element. Importantly, curriculum learning avoids all the spikes of the variance max element, which all happen to be where the baseline training diverges. This is one of the reasons why curriculum learning can provide substantial token/time-wise speedup for large-batch training. One may wonder why gradient clipping cannot help avoid these extreme gradient variance outliers. Although gradient clipping can avoid too large/small gradient at every single step, it cannot avoid the gradient variance getting accumulated at certain dimensions, especially for large batch sizes.

5.4 COMPARING WITH RELATED WORKS

In the end, we compare the proposed work with two related works on the “1.5B model with batch size 4K” case which is the most challenging one. The first work is a “2-stage curriculum learning” where the first stage uses a shorter sequence length and the second stage uses the full sequence length (Press et al., 2020). Following the tuning strategy in the related work, we set the sequence length as 128 for the first stage and set its duration at about half of the baseline duration (20K steps). The second work is the “batch size warmup” technique used by GPT-3 pre-training where the training starts with a smaller batch size (sequence length unchanged) and gradually increases to full batch size (Brown et al., 2020). In our experiment, we set the starting batch size at 128 and then gradually increase it to 4K, and set the warmup duration at 45K steps (same as the proposed work). Both related works use the same training parameters as the proposed work. Because we perform the two experiments on a different cluster, we do not report the training time as it is not comparable.

Figure 3 compares the training loss, validation perplexity, and Adam variance norm/max element. Both related works provide convergence speedup but it is less than the proposed work. More importantly, both related works still have training instability issues. The two-stage curriculum learning has an obvious training divergence at step 20K when the sequence length switches from 128 to 1K (the spike at 20K in Figure 3(f)). This is because when staying at the same shorter sequence length for too long, the model becomes heavily overfitted for that length which leads to divergence risk when switching to full length. The batch size warmup case does not provide any training stability benefit compared to the baseline even though it has a similar “token reduction” effect as curriculum learning. This indicates that providing the same number of shorter (less complex) sequences leads to better training stability than providing fewer number of same length (same complexity) sequences. In addition, batch size warmup has a limitation that the batch size must be multiple of data-parallel size, which will be large for distributed training. On the other hand, for curriculum learning the sequence length only needs to be multiple of 8 to enable Tensor Core acceleration. Both related works provide worse zero-shot evaluation results (case 16, 17 in Table 2).

6 CONCLUSION AND DISCUSSION

It is well known that curriculum learning, by presenting easier or simpler training data first, could provide faster convergence speed under the same training parameters. On the other hand, our study reveals another important benefit of curriculum learning as a regularization method: enable stable training at larger batch size and learning rate by providing a gradient variance reduction effect. Our evaluations on GPT-2 pre-training with up to 1.5B parameters demonstrate that by enabling stable and efficient training with 8x batch size and 4x learning rate, curriculum learning can reduce up to 54%/70% training token/time while still achieving better zero-shot evaluation results.

We hope that our work could motivate more studies of curriculum learning as a regularization method and its applications in other cases such as autoencoding language models and even computer vision models. We believe with a proper curriculum learning design, it is possible to observe similar training stability/efficiency benefits by curriculum learning in other areas. We also hope that our work could motivate more studies of training data efficiency in general: as training data keep accumulating, sooner or later one will not be able to finish even one epoch for many training tasks. In this situation,

intelligent data pipeline techniques (such as but not limited to curriculum learning) would become increasingly critical to the training stability/efficiency.

REFERENCES

- Oron Anschel, Nir Baram, and Nahum Shimkin. Averaged-dqn: Variance reduction and stabilization for deep reinforcement learning. In *International Conference on Machine Learning*, pp. 176–185. PMLR, 2017.
- Alexei Baevski and Michael Auli. Adaptive input representations for neural language modeling. In *International Conference on Learning Representations*, 2018.
- Yoshua Bengio, Jérôme Louradour, Ronan Collobert, and Jason Weston. Curriculum learning. In *Proceedings of the 26th annual international conference on machine learning*, pp. 41–48, 2009.
- Ondřej Bojar, Jindřich Helcl, Tom Kocmi, Jindřich Libovický, and Tomáš Musil. Results of the wmt17 neural mt training task. In *Proceedings of the second conference on machine translation*, pp. 525–533, 2017.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler, Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners. In H. Larochelle, M. Ranzato, R. Hadsell, M. F. Balcan, and H. Lin (eds.), *Advances in Neural Information Processing Systems*, volume 33, pp. 1877–1901. Curran Associates, Inc., 2020. URL <https://proceedings.neurips.cc/paper/2020/file/1457c0d6bfc4967418bfb8ac142f64a-Paper.pdf>.
- Daniel Campos. Curriculum learning for language modeling. *arXiv preprint arXiv:2108.02170*, 2021.
- Richard Cheng, Abhinav Verma, Gabor Orosz, Swarat Chaudhuri, Yisong Yue, and Joel Burdick. Control regularization for reduced variance reinforcement learning. In *International Conference on Machine Learning*, pp. 1141–1150. PMLR, 2019.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. In *NAACL-HLT*, 2019.
- Jeffrey L Elman. Learning and development in neural networks: The importance of starting small. *Cognition*, 48(1):71–99, 1993.
- Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B. Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models. *CoRR*, abs/2001.08361, 2020.
- Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. *CoRR*, abs/1412.6980, 2015.
- Tom Kocmi and Ondřej Bojar. Curriculum learning and minibatch bucketing in neural machine translation. In *Proceedings of the International Conference Recent Advances in Natural Language Processing, RANLP 2017*, pp. 379–386, 2017.
- M Pawan Kumar, Benjamin Packer, and Daphne Koller. Self-paced learning for latent variable models. In *NIPS*, volume 1, pp. 2, 2010.
- Conglong Li, Ammar Ahmad Awan, Hanlin Tang, Samyam Rajbhandari, and Yuxiong He. 1-bit LAMB: Communication Efficient Large-Scale Large-Batch Training with LAMB’s Convergence Speed. *arXiv preprint arXiv:2104.06069*, 2021.
- Hongzi Mao, Shaileshh Bojja Venkatakrishnan, Malte Schwarzkopf, and Mohammad Alizadeh. Variance reduction for reinforcement learning in input-driven environments. In *International Conference on Learning Representations*, 2018.
- David Patterson, Joseph Gonzalez, Quoc Le, Chen Liang, Lluís-Miquel Munguia, Daniel Rothchild, David So, Maud Texier, and Jeff Dean. Carbon emissions and large neural network training. *arXiv preprint arXiv:2104.10350*, 2021.

-
- Matthew Peters, Mark Neumann, Mohit Iyyer, Matt Gardner, Christopher Clark, Kenton Lee, and Luke Zettlemoyer. Deep contextualized word representations. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pp. 2227–2237, 2018.
- Emmanouil Antonios Platanios, Otilia Stretcu, Graham Neubig, Barnabás Póczos, and Tom M Mitchell. Competence-based curriculum learning for neural machine translation. In *NAACL-HLT*, 2019.
- Ofir Press, Noah A Smith, and Mike Lewis. Shortformer: Better language modeling using shorter inputs. *arXiv preprint arXiv:2012.15832*, 2020.
- Alec Radford, Karthik Narasimhan, Tim Salimans, and Ilya Sutskever. Improving language understanding by generative pre-training. 2018a.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. Language models are unsupervised multitask learners. 2018b.
- Alec Radford, Jeffrey Wu, Dario Amodei, Daniela Amodei, Jack Clark, Miles Brundage, and Ilya Sutskever. Better language models and their implications. *OpenAI Blog*, 2019. URL <https://openai.com/blog/better-language-models>.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*, 21:1–67, 2020.
- Mrinmaya Sachan and Eric Xing. Easy questions first? a case study on curriculum learning for question answering. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 453–463, 2016.
- Mrinmaya Sachan and Eric Xing. Self-training for jointly learning to ask and answer questions. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pp. 629–640, 2018.
- Terence D Sanger. Neural network learning control of robot manipulators using gradually increasing task difficulty. *IEEE transactions on Robotics and Automation*, 10(3):323–333, 1994.
- Mohammad Shoeybi, Mostofa Patwary, Raul Puri, Patrick LeGresley, Jared Casper, and Bryan Catanzaro. Megatron-lm: Training multi-billion parameter language models using model parallelism. *arXiv preprint arXiv:1909.08053*, 2019.
- Petru Soviany, Radu Tudor Ionescu, Paolo Rota, and Nicu Sebe. Curriculum learning: A survey. *arXiv preprint arXiv:2101.10382*, 2021.
- Hanlin Tang, Shaoduo Gan, Ammar Ahmad Awan, Samyam Rajbhandari, Conglong Li, Xiangru Lian, Ji Liu, Ce Zhang, and Yuxiong He. 1-bit Adam: Communication Efficient Large-Scale Training with Adam’s Convergence Speed. In *Proceedings of the 38th International Conference on Machine Learning*, pp. 10118–10129, 2021.
- Yi Tay, Shuohang Wang, Anh Tuan Luu, Jie Fu, Minh C Phan, Xingdi Yuan, Jinfeng Rao, Siu Cheung Hui, and Aston Zhang. Simple and effective curriculum pointer-generator networks for reading comprehension over long narratives. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 4922–4931, 2019.
- Trieu H Trinh and Quoc V Le. A simple method for commonsense reasoning. *arXiv preprint arXiv:1806.02847*, 2018.
- Chong Wang, Xi Chen, Alexander J Smola, and Eric P Xing. Variance reduction for stochastic gradient optimization. In *NIPS*, 2013.
- Xin Wang, Yudong Chen, and Wenwu Zhu. A comprehensive survey on curriculum learning. *arXiv preprint arXiv:2010.13166*, 2020.

-
- Benfeng Xu, Licheng Zhang, Zhendong Mao, Quan Wang, Hongtao Xie, and Yongdong Zhang. Curriculum learning for natural language understanding. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 6095–6104, 2020.
- Yang You, Jing Li, Sashank Reddi, Jonathan Hseu, Sanjiv Kumar, Srinadh Bhojanapalli, Xiaodan Song, James Demmel, Kurt Keutzer, and Cho-Jui Hsieh. Large batch optimization for deep learning: Training bert in 76 minutes. In *International Conference on Learning Representations*, 2020. URL <https://openreview.net/forum?id=Syx4wnEtvH>.
- Rowan Zellers, Ari Holtzman, Hannah Rashkin, Yonatan Bisk, Ali Farhadi, Franziska Roesner, and Yejin Choi. Defending against neural fake news. In *Proceedings of the 33rd International Conference on Neural Information Processing Systems*, pp. 9054–9065, 2019.
- Wei Zhang, Wei Wei, Wen Wang, Lingling Jin, and Zheng Cao. Reducing bert computation by padding removal and curriculum learning. In *2021 IEEE International Symposium on Performance Analysis of Systems and Software (ISPASS)*, pp. 90–92. IEEE, 2021.
- Xuan Zhang, Gaurav Kumar, Huda Khayrallah, Kenton Murray, Jeremy Gwinnup, Marianna J Martindale, Paul McNamee, Kevin Duh, and Marine Carpuat. An empirical exploration of curriculum learning for neural machine translation. *arXiv preprint arXiv:1811.00739*, 2018.
- Xuan Zhang, Pamela Shapiro, Gaurav Kumar, Paul McNamee, Marine Carpuat, and Kevin Duh. Curriculum learning for domain adaptation in neural machine translation. In *NAACL-HLT*, 2019.

Table 4: Zero-shot evaluation of the trained 117M models on the WikiText-103 and LAMBADA datasets, following the evaluation methodology from (Shoeybi et al., 2019).

Case	Pre-training parameters	Pre-training steps, tokens, time	Pre-training test perplexity ↓	WikiText-103 perplexity ↓	LAMBADA accuracy ↑
1: Baseline	bsz512-seqlen1K	300K, 157B, 37Hr	20.75	27.78	33.19%
2: CL 20K	bsz512-seqlen1K	310K, 157B, 38Hr	20.52	27.41	34.23%
3: CL 40K	bsz512-seqlen1K	320K, 157B, 39Hr	20.22	26.94	33.69%
4: CL 60K	bsz512-seqlen1K	330K, 157B, 40Hr	20.17	27.10	34.56%
5: CL 80K	bsz512-seqlen1K	340K, 157B, 40Hr	20.26	27.04	34.16%
6: CL 100K	bsz512-seqlen1K	350K, 157B, 41Hr	20.29	27.14	34.19%
7: Baseline	bsz4K-seqlen1K	37.5K, 157B, 16Hr	20.99	28.09	32.54%
8: CL 10K	bsz4K-seqlen1K	42.5K, 157B, 17Hr	20.37	27.20	34.19%
9: CL 15K	bsz4K-seqlen1K	45K, 157B, 17Hr	20.34	27.28	34.58%
10: CL 20K	bsz4K-seqlen1K	47.5K, 157B, 17Hr	20.36	27.12	34.74%
11: CL 25K	bsz4K-seqlen1K	50K, 157B, 17Hr	20.38	27.41	33.59%
12: CL 30K	bsz4K-seqlen1K	52.5K, 157B, 17Hr	20.40	27.30	33.98%
13: Baseline	bsz512-seqlen2K	150K, 157B, 32Hr	20.87	28.19	32.99%
14: CL 50K	bsz512-seqlen2K	175K, 157B, 34Hr	20.17	26.59	33.48%
15: CL 70K	bsz512-seqlen2K	185K, 157B, 34Hr	19.99	26.34	33.30%
16: CL 90K	bsz512-seqlen2K	195K, 157B, 35Hr	19.93	26.26	32.68%
17: CL 110K	bsz512-seqlen2K	205K, 157B, 36Hr	19.90	26.43	34.02%
18: CL 130K	bsz512-seqlen2K	215K, 157B, 36Hr	19.94	26.48	33.24%

A APPENDIX

A.1 CURRICULUM LEARNING HYPERPARAMETERS TUNING STRATEGY

To find a good tuning strategy for curriculum learning, we first perform a simple grid search on the smaller 117M model. Table 4 summarizes the grid search results for the curriculum learning duration (T in Section 4) where we set the starting sequence length ($seqlen_1$ in Section 4) fixed at 8. We then choose the “best” duration based on the test data perplexity and zero-shot evaluation results at the end of 157B-token pre-training. One thing to note is that all the CL cases have quite comparable zero-shot evaluation results, indicating that CL’s performance is not very sensitive to the CL duration within a reasonable range.

On the other hand, the above grid search also sheds light on a better tuning strategy: for all three batch size-sequence length combinations, we find that the “best” curriculum duration is always the longest duration that does not have significant validation perplexity fluctuation during the first 10K steps (i.e., a few multiples of the LR warmup steps), as shown in Figure 4. Since this does not require training the model until full convergence, this heuristic reduces the hyperparameter tuning cost of the CL-based approach. For the 1.5B model, we used this strategy to select the curriculum learning duration based on the validation perplexity curve at the beginning.

For the starting sequence length $seqlen_1$, our grid search results show that it’s generally better to set it as small as possible, to maximize the stability and convergence speedup benefit. However, if the validation perplexity has significant fluctuation at the very beginning, it is better to increase the starting sequence length. This is why we choose 8 and 64 as the starting sequence length for 117M and 1.5B models, respectively. Note that this starting sequence length should be a multiple of 8 to enable Tensor Core acceleration.

Overall, a general tuning strategy can be summarized as:

- 1) Start with $seqlen_1 = 8$ and $T =$ a few multiples of LR warmup steps.
- 2) Increase $seqlen_1$ until the validation perplexity no longer has significant fluctuation at the very beginning.
- 3) Perform a binary search to find the largest T that does not have significant validation perplexity fluctuation during the first few multiples of LR warmup steps.

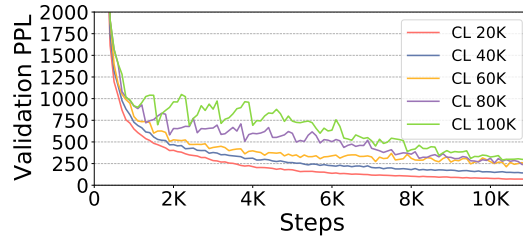


Figure 4: Step-wise validation perplexity during GPT-2 117M SeqLen 1K pre-training with batch size 512 and different curriculum learning duration. (“CL 20K” means applying curriculum learning to the first 20K steps).

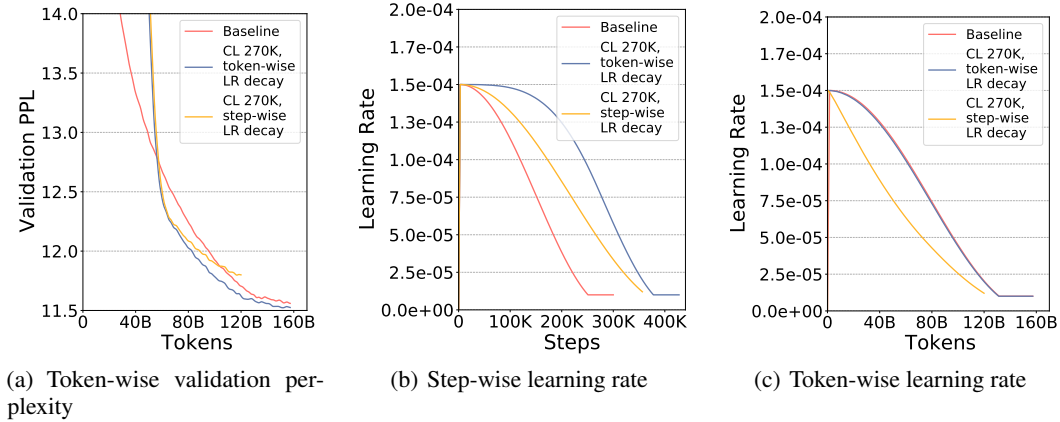


Figure 5: Validation perplexity and learning rate during GPT-2 1.5B SeqLen 1K pre-training with batch size 512, comparing the baseline and curriculum learning under different learning rate decay schedules (“CL 270K” means applying curriculum learning to the first 270K steps).

A.2 LEARNING RATE SCHEDULE FOR CURRICULUM LEARNING

As described in Section 5, for 117M model CL cases we increase the number of learning rate decay steps by half of the curriculum learning duration since CL cases require more steps to reach 157B tokens. However, we find that this is still not ideal, and for 1.5B model cases we change the learning rate decay to token-wise (same cosine decay over the 157B tokens) instead of step-wise. This is because for CL cases there are fewer tokens per step at the beginning. So even if we increase the LR decay steps, it still cannot avoid decaying faster token-wise at the beginning. As shown in Figure 5, CL with step-wise LR decay has faster token-wise LR decay compared to baseline, which leads to a worse validation perplexity curve. On the other hand, the same CL case with token-wise LR decay has a comparable LR schedule compared to baseline, which leads to better convergence.